

Pioneer *sound.vision.soul*



Headphones

Microphones

2006 / 2007




SE-CE10-XK Black




In-ear headphones

	Open-air dynamic stereo headphone
	20 - 20.000 Hz
	16 Ω
	30 mW
	98 dB/mW
	\varnothing 14.8 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	6 g without cord
	Carrying case / Ear pads x2
	Bass Boost Duct

SE-CS15V Black lacquer



SE-CS12 Black lacquer



In-ear headphones

	Open-air dynamic stereo headphone
	20 - 20.000 Hz
	16 Ω
	50 mW
	100 dB/mW
	\varnothing 13.5 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	5 g without cord
	Earphone chips x2 (medium size) (SE-CS12/SE-CS15V) Ear pads x2 / Storage pouch (SE-CS15V) 2 m extension cord (SE-CS15V)
	Selectable Earphone chip sizes: small / medium Integrated volume control (SE-CS15V)

SE-CS22 Silver



In-ear headphones

	Open-air dynamic stereo headphone
	18 - 22.000 Hz
	16 Ω
	100 mW
	105 dB/mW
	\varnothing 13.5 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	5 g without cord
	Earphone chips x2 (medium size) Ear pads x2
	Selectable Earphone chip sizes: small / medium

SE-CN25-X1 Silver



Design in-ear headphones


	Open-air dynamic stereo headphone
Hz	18 - 22.000 Hz
	16 Ω
Watt	100 mW
	106 dB/mW
	\varnothing 13.5 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	6 g without cord
	Earphone chips x2 (medium size)
	Selectable Earphone chip sizes: small / medium

SE-CL25 DN Grey



Inner-ear headphones


	Closed dynamic stereo headphone
Hz	8 - 22.000 Hz
	16 Ω
Watt	100 mW
	100 dB/mW
	\varnothing 9.2 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m (SE-CL20) / 0.55 m (SE-CL25DN)
	4 g without cord
	Earphone chip sizes: x2 small / x2 medium / x2 large
	Selectable Earphone chips MP3 neck strap (SE-CL25DN)



SE-CL20 Silver



SE-CL30 Silver



Inner-ear headphones

	Closed dynamic stereo headphone
Hz	5 - 23.000 Hz
	16 Ω
Watt	100 mW
	102 dB/mW
	\varnothing 10 mm
	\varnothing 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	5 g without cord
	Earphone chip sizes: x2 small / x2 medium / x2 large Storage pouch
	Selectable Earphone chips

SE-E11
Black



Lightweight clip-on headphones

	Open-air dynamic stereo headphone
Hz	20 - 20.000 Hz
Ω	16 Ω
Watt	50 mW
	100 dB/mW
	Ø 13.5 mm
	Ø 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	9 g without cord
	Cord strap for easy storage
	Adjustable hanger

SE-E03-2-X1
Silver



Lightweight clip-on headphones

	Open-air dynamic stereo headphone
Hz	15 - 24.000 Hz
Ω	32 Ω
Watt	50 mW
	104 dB/mW
	Ø 14 mm
	Ø 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	20 g without cord



SE-E33-X2
Silver/Red



SE-E33-X1
Silver/Black



Clip-on headphones

	Open-air dynamic stereo headphone
Hz	15 - 24.000 Hz
Ω	16 Ω
Watt	50 mW
	104 dB/mW
	Ø 16 mm
	Ø 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	20 g without cord
	Adjustable hanger: 3 stages / Changeable colour plates



SE-E07-X4 Silver



Clip-on headphones High Power for MP3

	Open-air dynamic stereo headphone
Hz	14 - 24.000 Hz
Ω	32 Ω
Watt	500 mW
	104 dB/mW
	Ø 30 mm
	Ø 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m
	30 g without cord
	Comfortable fit with elastic coating hanger High power & rich bass Low sound leakage

Neckband headphones High Power for MP3

	Open-air dynamic stereo headphone
Hz	12 - 24.000 Hz
Ω	32 Ω
Watt	500 mW
	105 dB/mW
	Ø 30 mm
	Ø 3.5 mm L-Type 3P mini-plug (gold plated)
	OFC litz wire 1.2 m (single-sided cord)
	33 g without cord
	Foldable neckband High power & rich bass Low sound leakage



SE-N7-EX1 Silver



SE-H33 Silver



Lighthouse stereo headphones

	Open-air dynamic stereo headphone
Hz	20 - 20.000 Hz
Ω	32 Ω
Watt	100 mW
	104 dB/mW
	Ø 30 mm
	Ø 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 1.0 m (SE-H33) / 5.0 m (SE-H35TV)
	45 g without cord
	Ear pads x2, (SE-H33/SE-H35TV) 1m extension cord (SE-H33) Ø 3.5 mm L-Type 3P mini-plug (gold plated) (SE-H33) 6.3 mm 3P plug adapter (gold plated) (SE-H35TV)
	Foldable headband Integrated volume control and STEREO/MONO switch (SE-H35TV)

SE-H35 TV Silver





SE-M280
Black



SE-M380
Silver



Hi-Fi stereo / DVD headphones

	Closed dynamic stereo headphone
Hz	5 - 25.000 Hz (SE-M280) / 5 - 28.000 Hz (SE-M380)
Ω	32 Ω
Watt	1.200 mW (SE-M280) / 1.500 mW (SE-M380)
	102 dB/mW (SE-M280) / 105 dB/mW (SE-M380)
	\varnothing 40 mm
	\varnothing 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 3.5 m (single-sided cord)
	225 g without cord (SE-M280) / 205 g without cord (SE-M380)
	6.3 mm 3P plug adapter (gold plated)
	Free-adjusting headband system Reversible housing for one-ear monitoring

Stereo headphones for TV with volume control

	Closed dynamic stereo headphone
Hz	5 - 25.000 Hz
Ω	32 Ω
Watt	1.200 mW
	102 dB/mW
	\varnothing 40 mm
	\varnothing 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 7.0 m (single-sided cord)
	225 g without cord
	6.3 mm 3P plug adapter (gold plated)
	Long cable & jersey ear pads Free-adjusting headband system Integrated volume control and STEREO/MONO switch

SE-M285TV
Black



SE-A1000
Black








High-end home theater headphones

	Open-air dynamic stereo headphone
Hz	10 - 30.000 Hz
Ω	45 Ω
Watt	1.500 mW
	102 dB/mW
	\varnothing 50 mm
	\varnothing 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 6 m (single-sided cord)
	280 g without cord
	Storage pouch / Cord strap 6.3 mm 3P plug adapter (gold plated)
	Long cable and jersey ear pads Dual stabilised hanger and free-adjusting headband Braided cord, metal plug with coil bush.



DIGITAL WIRELESS HEADPHONE FOR SURROUND SOUND

Headphone

	Closed dynamic stereo headphone
Hz	12 - 22.000 Hz
	Ø 40 mm
	250 g without batteries
	DC 3 V (UM-3, AA-sized x2) DC 2.4 V (rechargeable battery x2)
	27 hours (UM-3, AA-size) 16 hours (rechargeable batteries)










SE-DIR800C Headphone



SE-DIR800C Transmitter




Transmitter

	DC9V/800 mA (with attached AC adaptor)
5.1 ch	Dolby Digital / Dolby Surround / DTS / PCM (Fs = 44,1 kHz, 48 kHz)
	Dolby Headphone mode (DH1 / DH2 / DH3 / Off) Dolby Pro Logic II mode (AUTO/MOVIE/MUSIC/OFF)
	Optical input (rectangular-type) x1 Digital input (pin jack) x1 Analog input (pin jack left/right) x1
	209 x 50 x 104 mm
	520 g
	Digital Infrared Audio Transmission
	12 - 22.000 Hz
	Approximately 8 m to the front
	Dolby Digital/DTS/Dolby Pro Logic II/Dolby Surround compatibility Full digital surround sound from 2-channel to any 5.1-channel source, DVD, digital cable/satellite and game systems Digital connectivity Output terminal to connect second headphone





SE-MJ2
Silver

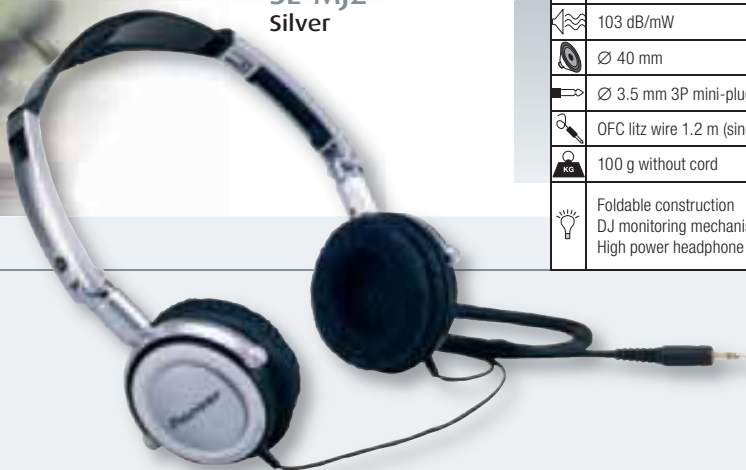


Monitor headphones with swivel-out DJ mechanism

	Closed dynamic stereo headphone
Hz	12 – 22.000 Hz
	32 Ω
Watt	500 mW
	103 dB/mW
	Ø 40 mm
	Ø 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 1.2 m (single-sided cord)
	100 g without cord
	Foldable construction DJ monitoring mechanism High power headphone



Monitor headphones with swivel-out DJ mechanism

	Closed dynamic stereo headphone
Hz	10 – 25.000 Hz
	32 Ω
Watt	1.000 mW
	105 dB/mW
	Ø 40 mm
	Ø 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 0.5 m (single-sided cord)
	100 g without cord
	1.0 m extension cord
	Foldable construction DJ monitoring mechanism Highly durable cord High power headphone

SE-MJ3
Black

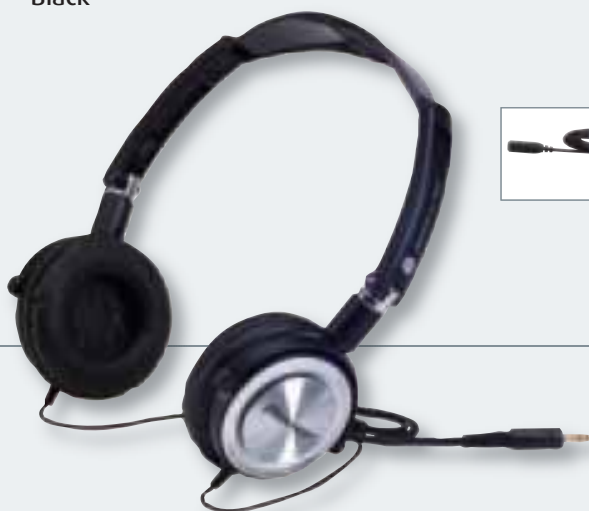

SE-MJ5
Black

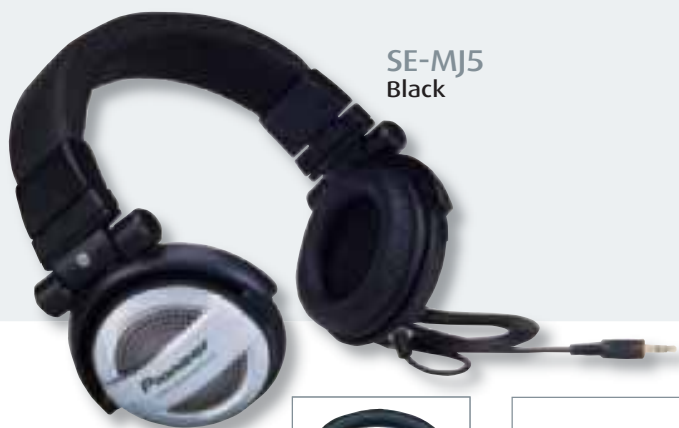












Monitor headphones with swivel-out DJ mechanism

	Closed dynamic stereo headphone
Hz	5 – 28.000 Hz
	32 Ω
Watt	1.500 mW
	105 dB/mW
	Ø 40 mm
	Ø 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 1.2 m (single-sided cord)
	220 g without cord
	Storage pouch / Cord strap 6.3 mm 3P plug adapter (gold plated) 2.0 m extension cord Velvet ear pad x2
	Foldable construction DJ monitoring mechanism Highly durable cord Changeable earpads High power headphone














SE-M10R
Black

High end monitor headphones with swivel-out DJ mechanism	
	Closed dynamic stereo headphone
Hz	5 - 28.000 Hz
	35 Ω
Watt	3.000 mW
	106 dB/mW
	Ø 50 mm
	Ø 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 2.5 m (single-sided cord) coiled: 7 m when straightened
	275 g without cord
	6.3 mm 3P plug adapter (gold plated)
	Detachable coiled cord Screw-locking construction to adjust length of the band Full DJ monitoring mechanism



DM-DV5
Black



Microphone	
	Dynamic type microphone
	Unidirectional
Hz	80 - 13.000 Hz
	- 57 dB (0 dB = 1V/Pa, at 1 kHz)
	600 Ω
	Ø 3.5 mm 2P mini-plug (gold plated)
	3.0 m / Ø 4 mm (single core shielded cord)
	255 g including cord (DM-DV5) / 225 g including cord (DM-DV15)
	Maximum outside Ø 56 mm, maximum length 213 mm (DM-DV5) maximum length 172 mm (DM-DV15)
	From Ø 21.5 mm to Ø 34 mm
	6.3 mm 2P plug adapter (gold plated)
	Talk switch ON/OFF Iron casting for high durability (DM-DV15) XLR-Canon type connection (DM-DV15)

DM-DV15
Black



















MULTIMEDIA HEADPHONES









HA-HS32N
Silver



Multimedia headphones	
	Open-air dynamic stereo headphone
Hz	20 - 20.000 Hz
	32 Ω
Watt	100 mW
	104 dB/mW
	\varnothing 30 mm
	\varnothing 3.5 mm 3P mini-plug (gold plated)
	OFC litz wire 2.0 m (single-sided cord)
	61 g without cord (HA-HS31) / 50 g without cord (HA-HS32N)
	For IBM PC/AT or compatible computers 2 m cable with colour coded plugs Integrated volume control and VOICE/MUSIC switch Neckband (HA-HS32N)
	Electric condenser microphone
	Omnidirectional
Hz	100 - 10.000 Hz
	- 35 dB (HA-HS31) / - 37 dB (HA-HS32N) (0 dB = 1V/Pa, at 1 kHz)
	2 k Ω or below
	\varnothing 3.5 mm 3P mini-plug (gold plated)

HA-HS31
Silver



	Type
Hz	Frequency response
	Impedance
Watt	Maximum input power
	Sensitivity
	Driver Unit
	Plug
	Cord
	Weight
	Functionality
	Accessories
	Power source
	Operation time
	External dimensions
	Audio inputs
	Directivity
	Sensibility
	Type
	Dimensions (W x H x D)
	Grip dimensions
	Power requirements
5.1 ch	Decoder formats
	Transmission system
	Transmission range
	Effective Range
	Surround functions



Pioneer World

Surround yourself with limitless possibilities



Digital Home Cinema



Plasma TV



DJ Products



Navigation Systems

PIONEER EUROPE N.V.

Haven 1087
Keetberglaan 1
B-9120 Melsele
Tel.: +32 (0)3 570 05 11



"Dolby", the double-D symbol, "Pro Logic" and "Dolby Digital" are trademarks of Dolby Laboratories Licensing Corporation. "DTS" and "DTS Digital Surround" are trademarks of Digital Theater Systems, Inc.

Published by:

PIONEER EUROPE NV

Haven 1087, Keetberglaan 1, B-9120 Melsele

Tel.: + 32 (0)3 570 05 11

Copyright 2006 by Pioneer Europe NV. All rights reserved.

www.pioneer.eu

Features and specifications of the products described or illustrated in this catalogue are correct at the time of printing but could change as production changes might occur. This catalogue may contain typographical errors and the colours of the depicted products may deviate slightly from reality. Consult your Pioneer dealer to ensure that actual features and specifications match your requirements.
This catalogue may contain references to products that may or will not be available in your country.

For detailed information concerning Pioneer's Environmental policy,
please visit the following site:
<http://www.pioneer.eu>

Your local Pioneer dealer